

1/6

Fig. 1

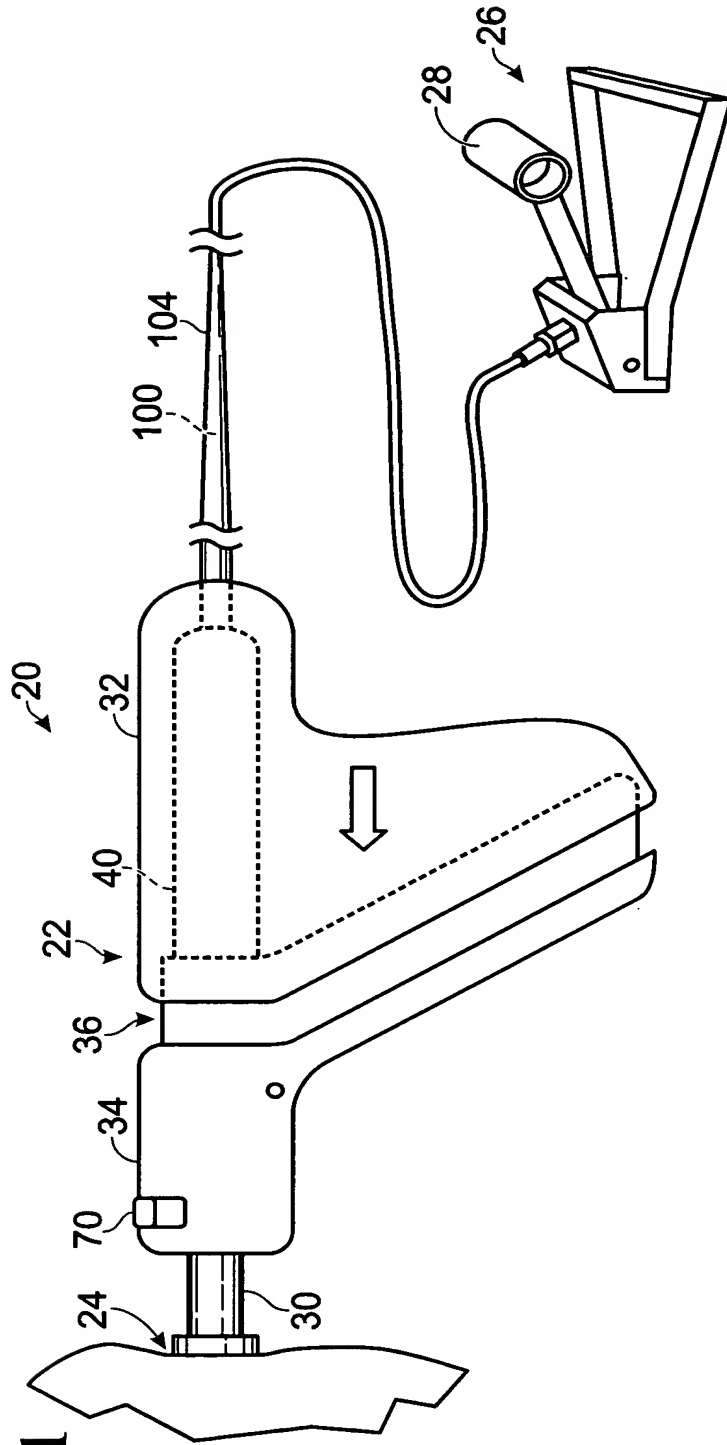
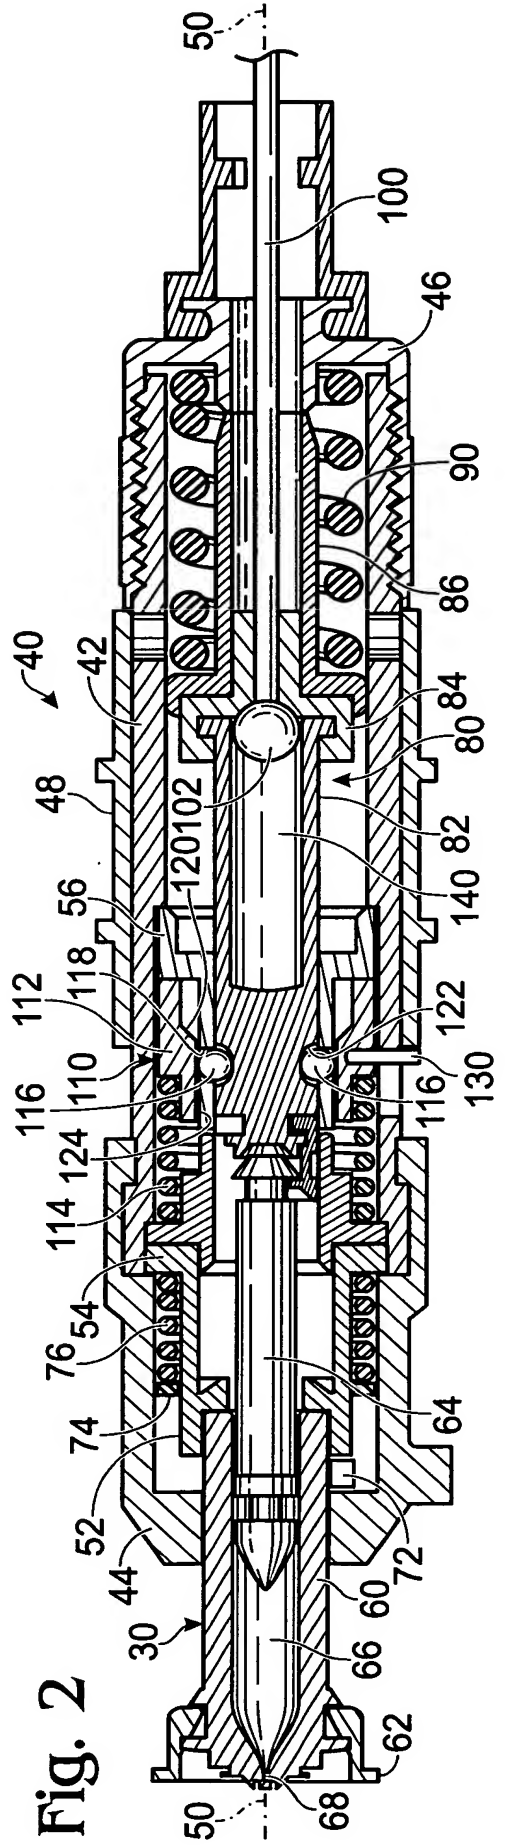


Fig. 2



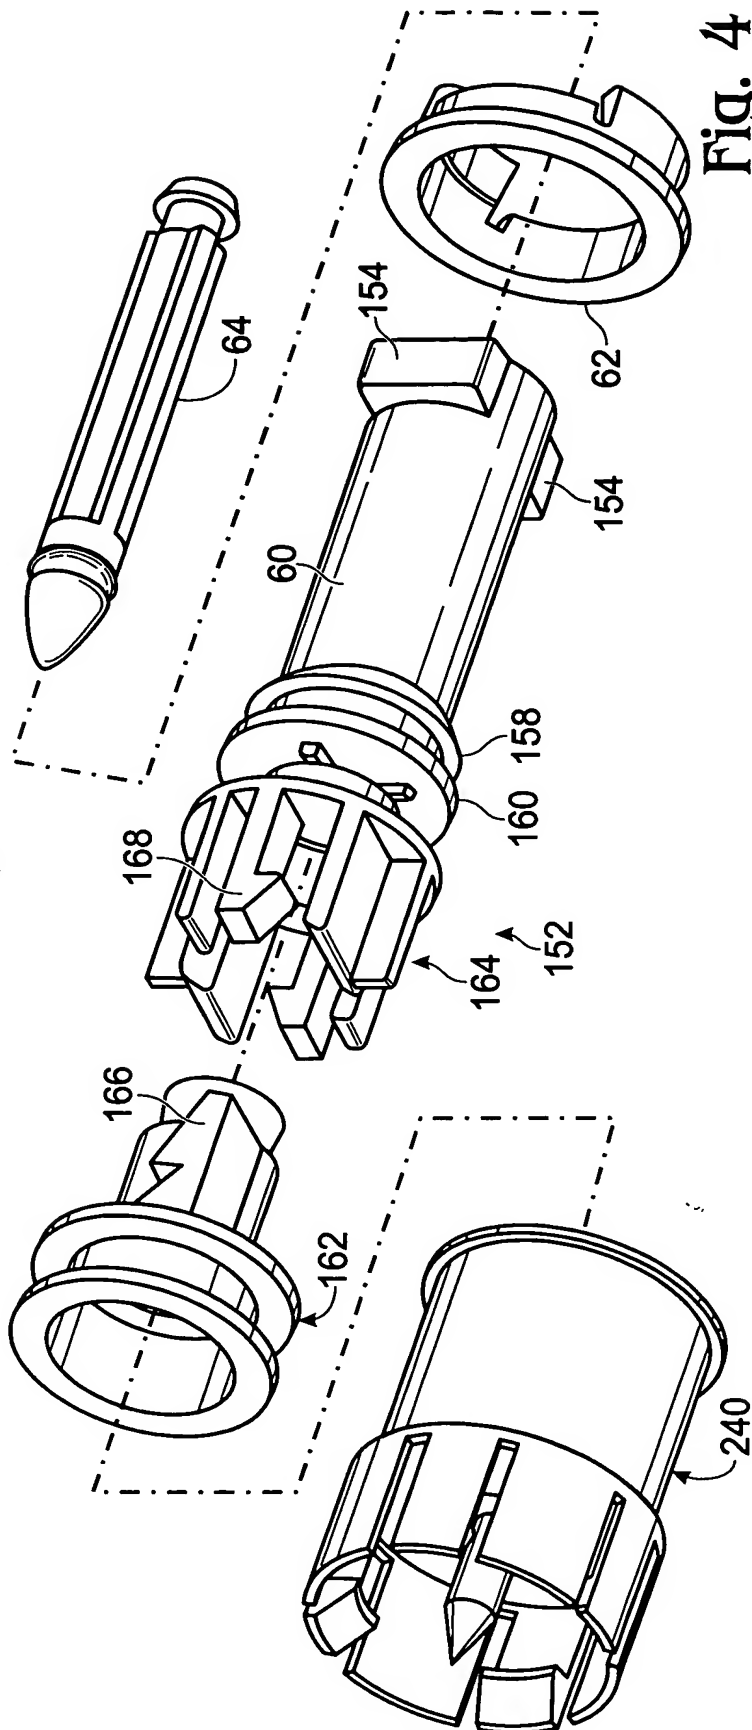


Fig. 5

Fig. 6

Fig. 6 is a perspective view of a mechanical assembly 40. The assembly includes a main body 44 with a threaded section 74 and a flange 76. A rod 60 is inserted through the body, with a cap nut 70 at the top. A bracket 200 is attached to the side, featuring a U-shaped member 208 and a pin 210. A dashed line 202 indicates a cross-section. The rod 60 has a threaded end 50 and a smooth end 152. A bracket 206 is also shown at the bottom.

4/6

Fig. 7

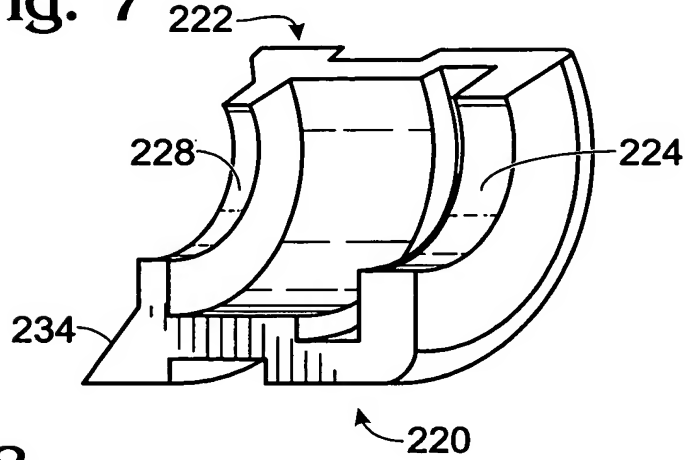


Fig. 8


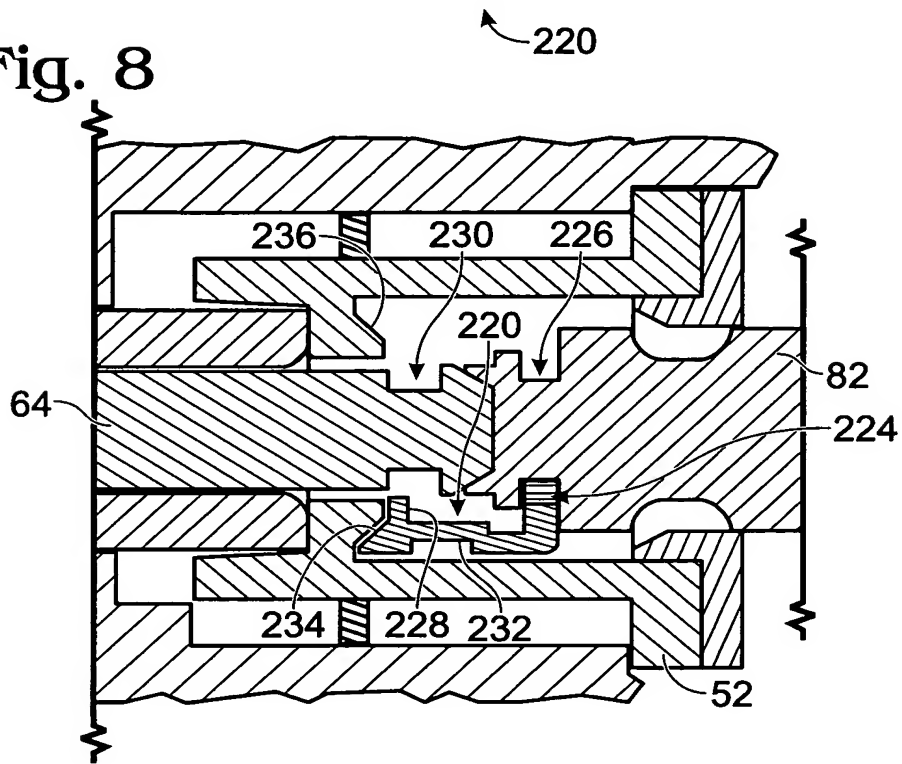


Fig. 10

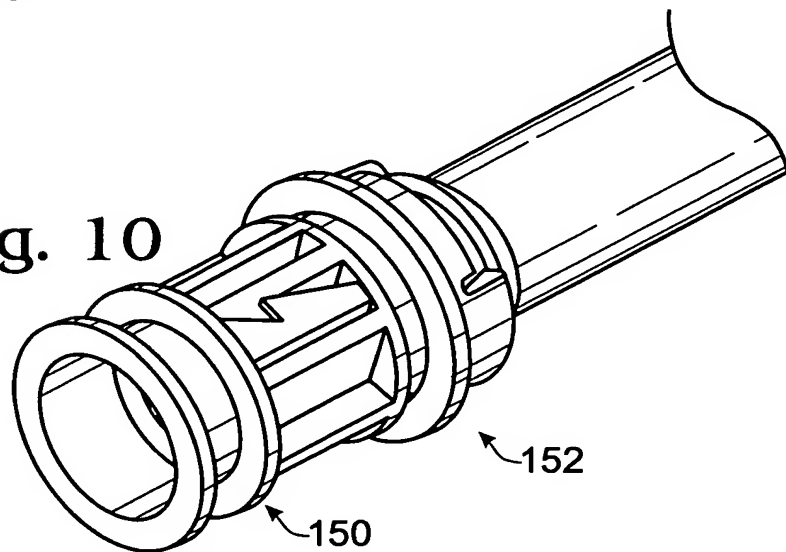

5/6

Fig. 9


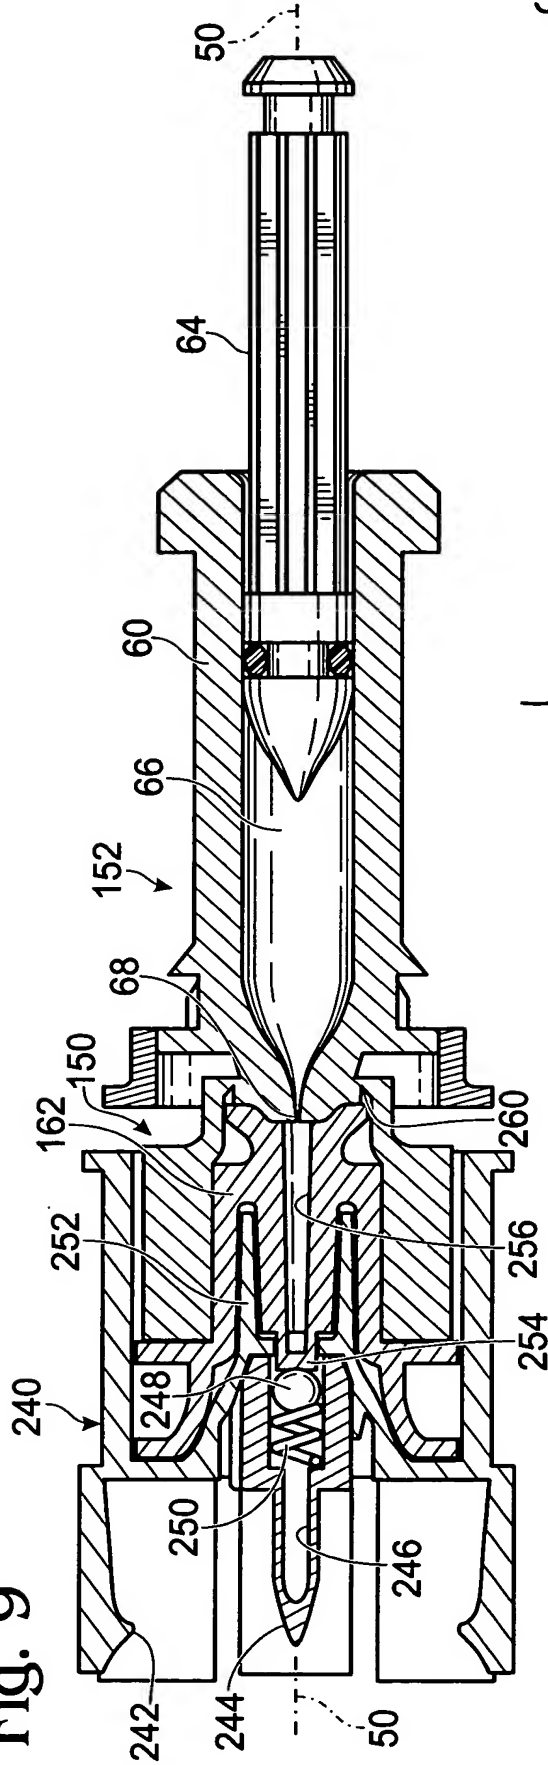


Fig. 11

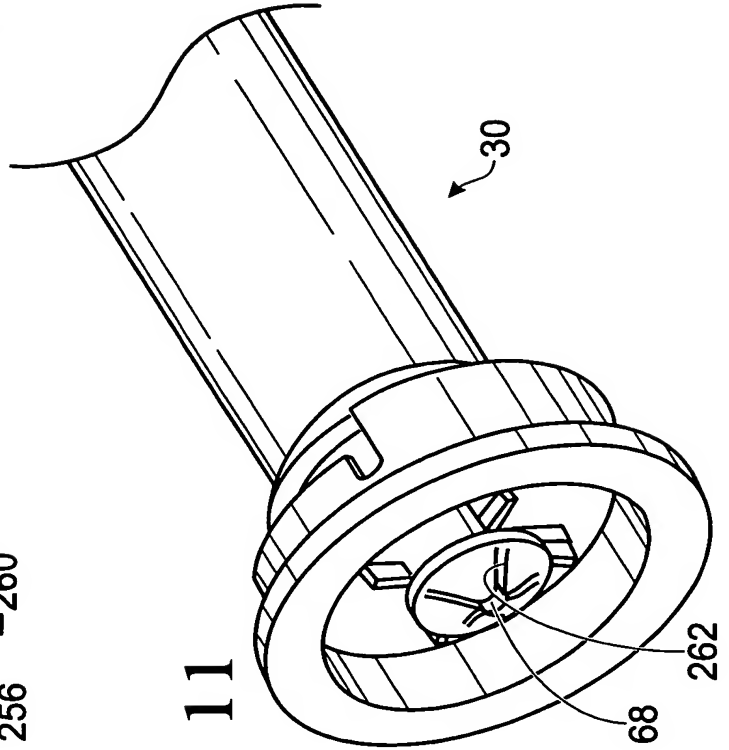

6/6

Fig. 12

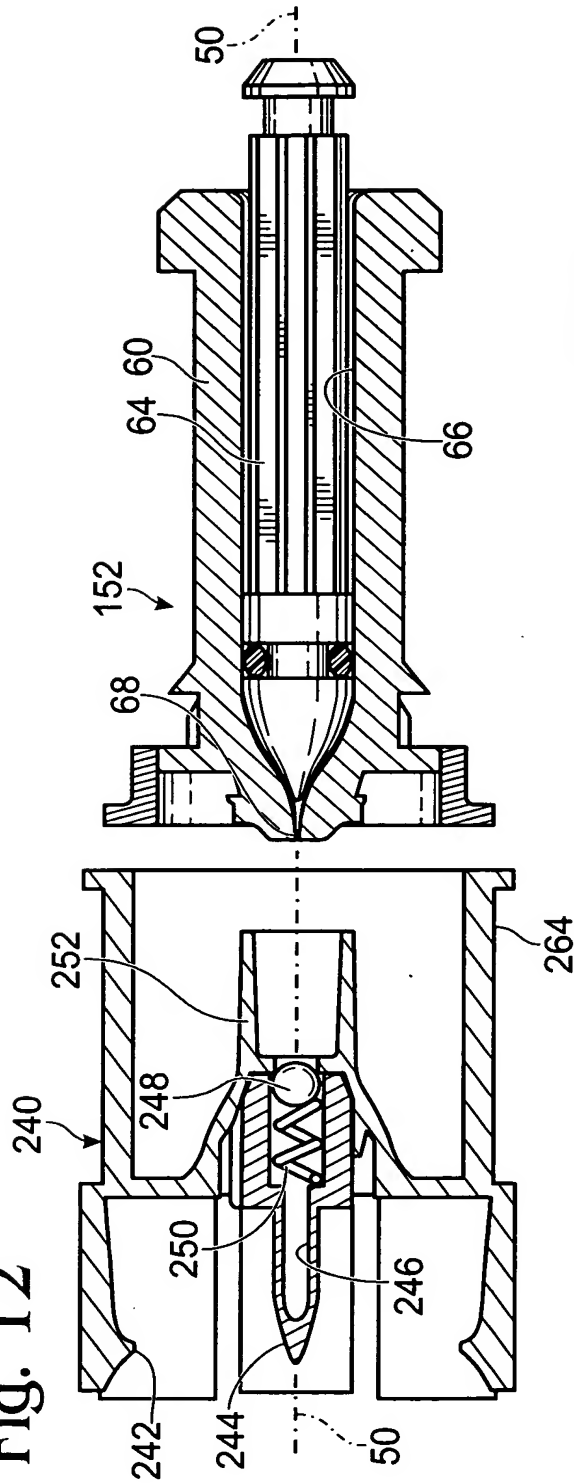


Fig. 13

